

BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. WEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO
GARY D. YACURA

OF COUNSEL:
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

INTELLECTUAL PROPERTY LAW
3110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
USA

(703) 205-8000

FAX (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLOX
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUELLE, PH.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
RICHARD J. GALLAGHER
JAYNE M. SAYDAH*
MARYANNE ARMSTRONG
HYUNG N. SOHN
ALAN PEDERSEN-GILES
KECIA J. REYNOLDS

REG. PATENT AGENTS:
FREDERICK R. HANDREN
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, PH.D.
ROBERT E. GOOZNER, PH.D.
MATTHEW J. LATTIG
TIMOTHY R. WYCKOFF
KRISTI L. RUPERT, PH.D.
LARRY J. HUME
ALBERT K. LEE
HAYRY A. SAYADIAN, PH.D.
EVE L. FRANK, PH.D.
MATTHEW T. SHANLEY

11/16/00
J0685 U.S. PTO

11/16/00
J0685 U.S. PTO

Date: November 16, 2000
Docket No.: 0104-0308P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

As authorized by the inventor(s), transmitted herewith for filing
is a patent application applied for on behalf of the inventor(s)
according to the provisions of 37 CFR 1.41(c).

Inventor(s): MATTSSON, Ulf
DAS, Tamojit

For: A METHOD FOR ALTERING ENCRYPTION STATUS IN A RELATIONAL
DATABASE IN A CONTINUOUS PROCESS

Enclosed are:

X A specification consisting of 13 pages

X 1 sheet(s) of formal drawings

 Certified copy of Priority Document(s)

X Executed Declaration in accordance with 37 CFR 1.64 will follow

 A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27

X Preliminary Amendment

X Information Sheet

 Information Disclosure Statement, PTO-1449 with reference(s)

Other _____

The filing fee has been calculated as shown below:

| LARGE ENTITY | | | | SMALL ENTITY | | | |
|--|-----------|-----------|-----------|---------------|----|-----------|----------|
| FOR | NO. FILED | NO. EXTRA | RATE | FEE | | RATE | FEE |
| BASIC FEE | ***** | ***** | ***** | | or | **** | |
| | ***** | ***** | ***** | \$710.00 | | **** | \$355.00 |
| | ***** | ***** | ***** | | | **** | |
| TOTAL CLAIMS | 15 - 20 = | 0 | x18 = \$ | 0.00 | or | x 9 = \$ | 0.00 |
| INDEPENDENT | 3 - 3 = | 0 | x80 = \$ | 0.00 | or | x 40 = \$ | 0.00 |
| MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u> | | | +270 = \$ | 0.00 | or | +135 = \$ | 0.00 |
| TOTAL \$ 710.00 | | | | TOTAL \$ 0.00 | | | |

X The application transmitted herewith is filed in accordance with 37 CFR 1.41(c). The undersigned has been authorized by the inventor(s) to file the present application. The original duly executed patent application together with the surcharge will be forwarded in due course.

X A check in the amount of \$ 710.00 to cover the filing fee and recording fee (if applicable) is enclosed.

_____ The Government Filing Fee will be paid at the time of completion of the filing requirement.

_____ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

X Send Correspondence to: BIRCH, STEWART, KOLASCH & BIRCH, LLP
P. O. Box 747
Falls Church, Virginia 22040-0747

09112236 111600

— No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

James M. Slattery *By No. 32334*
JAMES M. SLATTERY

Reg. No. 28,380

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000

JMS/djm

00911-92621260

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: MATTSSON et al.
Appl. No.: New Group:
Filed: November 16, 2000 Examiner:
For: A METHOD FOR ALTERING ENCRYPTION STATUS
IN A RELATIONAL DATABASE IN A CONTINUOUS
PROCESS

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

November 16, 2000

Sir:

The following preliminary amendments and remarks are respectfully submitted in connection with the above-identified application.

AMENDMENTS

IN THE CLAIMS:

Please amend the claims as follows:

Claim 3, line 1, delete "or 2"

Claim 14, line 1, delete "or 13"

0971223-14560

REMARKS

Claims 1-15 are pending in the present application. The claims have been amended to remove the multiple dependencies and to place the application into better form prior to examination.

Entry of the above amendments is earnestly solicited. An early and favorable first action on the merits is earnestly solicited.

Should there be any outstanding matters that need to be resolved in the present application, the Examiner is respectfully requested to contact James M. Slattefy (Reg. 28,380) at the telephone number of the undersigned below.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By Joe M. Mumay ^{Reg No 32,380}
for James M. Slattefy, #28,380

JMS/djm
0104-0308P

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

A METHOD FOR ALTERING ENCRYPTION STATUS IN A RELATIONAL
DATABASE IN A CONTINUOUS PROCESS

Field of invention

The present invention relates to a method for
altering encryption status in a relational database in a
5 continuous process reducing the need for taking the
database offline.

Background of the invention

In order to protect information stored in a
10 database, it is known to store sensitive data encrypted
in the database. To access such encrypted data you have
to decrypt it, which could only be done by knowing the
encryption algorithm and the specific decryption key
being used. The access to the decryption keys could be
15 limited to certain users of the database system, and
further, different users could be given different access
rights.

Specifically, it is preferred to use a so-called
granular security solution for the encryption of
20 databases, instead of building walls around servers or
hard drives. In such a solution, which is described in
the document WO 97/49211 by the same applicant, a
protective layer of encryption is provided around
specific sensitive data-items or objects. This prevents
25 outside attacks as well as infiltration from within the
server itself. This also allows the system manager to
define which data stored in databases are sensitive and
thereby focusing the protection only on the sensitive
data, which in turn minimizes the delays or burdens on
30 the system that may occur from other bulk encryption
methods.

5 It is further possible to assign different encryption keys of the same algorithm to different data columns. With multiple keys in place, intruders are prevented from gaining full access to any database since a different key could protect each column of encrypted data.

In most commercial applications accessibility is a critical issue. On the Internet, especially in web-based applications, customers expect a service to be accessible when they want to use it.

Object of the invention

This object is achieved by means of a method
35 according to the appended claims.

Summary of the invention

According to the invention, a method for altering encryption status in a relational database in a continuous process, wherein at least one table of said database comprises at least one base area and at least one maintenance area, comprising the steps of: copying all records from said base area to said maintenance area; directing action of commands intended for said base area to said maintenance area; altering encryption status of said base area; copying all data records from said maintenance area to said base area; and redirecting action of commands to said base area.

Hereby a method is provided which significantly improves the uptime of a database system. With this method the database owner easily can alter encryption settings in the database while it is up and running. Since a rerouting of the access is provided, data will always be accessible. Thus, the security administrator (SA) can independently of any constraints regarding when the database has to be up add or remove encryption when it is needed. For example, if a security leak is found in a web-application such as an Internet store during rush hours, the management of that company would with previous solutions have had to decide whether to risk sales or risk that someone would intrude in their system gaining access to unencrypted data in the database. This is eliminated with the method according to the invention. Another advantage is that regular maintenance work can be performed during daytime, reducing the need for costly overtime since the maintenance personnel don't have to work when the database can be taken offline, which mostly is during night hours.

The term encryption status is to be understood as how to protect data elements in the base area, for instance whether or not the data elements are subject for encryption. In another embodiment it could also be understood as changing the encryption level, from strong

5

10

15

15

20

20

25

30

35

the steps of: activating encryption means for said corresponding column; directing action of commands intended for said base area to said maintenance area; copying all records from said base area to said corresponding area; and emptying said base area.

Hereby a method is provided which, in addition to the above mentioned advantages, allows continuous encryption on tables that have explicit locks i.e. row exclusive (RX) or share row exclusive (SRX) locks.

Brief description of the drawing

For exemplifying purposes, the invention will be described to embodiments thereof illustrated in the attached drawing, wherein:

Fig. 1 is a flow-chart illustrating an embodiment of a method according to the invention.

Description of a preferred embodiment

Referring to fig. 1, a method for altering encryption on column level in a relational database in a continuous process, without the need for taking the database offline according to a preferred embodiment of the invention is now to be described. In this embodiment the altering is performed on column level.

The tables I and II below illustrates an example of a database table, "tab", for which encryption is to be added to a column. Table I describes the structure of the database table "tab" and Table II is an example of the contents in such a table.

| Data element | Data type | Value | Comment |
|---------------|---------------|----------|-----------------|
| cust_id | NUMBER | NOT NULL | Primary key |
| name | VARCHAR2 (64) | NOT NULL | |
| date_of_birth | DATE | NOT NULL | |
| user_name | VARCHAR2 (32) | NOT NULL | |
| password | VARCHAR2 (32) | NOT NULL | To be encrypted |
| maint | VARCHAR2 (32) | NULL | |

Table I

Table II

10

Table III

Preferably, if needed, the method contains a step, which checks whether the column "password" is nullable, i.e the column does not have a NOT NULL constraint. Then the column is altered to be nullable.

2007-11-09 11:51 (S) 1971000/Anathcategory anathplaga/2006679 Continous encryption
1971000/US (S) (S) 2 Continous encryption for US (S)

the base column is performed simultaneously with the addition of the trigger.

- In another step S3, the base column "password" is emptied. For instance, this could be performed by
- 5 updating the base column with NULL. Preferably, if it is required by the later applied encryption, the method comprises the further step S4, wherein the table is altered in order to change the base column data type to the data type RAW. The present structure and contents of
- 10 "tab" is described in tables IV and V, respectively.

| Data element | Data type | Value | Comment |
|---------------|---------------|----------|-----------------|
| cust_id | NUMBER | NOT NULL | Primary key |
| name | VARCHAR2 (64) | NOT NULL | |
| date of birth | DATE | NOT NULL | |
| user_name | VARCHAR2 (32) | NOT NULL | |
| password | RAW | NULL | To be encrypted |
| maintenance | VARCHAR2 (32) | NOT NULL | |

Table IV

| cust_id | name | date of birth | user_name | password | maint |
|---------|--------------|---------------|-----------|----------|-------|
| 1001 | MAX | 19910101 | MNN | NULL | abc |
| 1002 | MARTIN | 19920202 | MKR | NULL | cdf |
| 1003 | JOHAN | 19930303 | JON | NULL | ghi |
| 1004 | MARIE-LOUISE | 19940404 | MLA | NULL | jkl |

Table V

- 15 Then, the step S5 of activating encryption means is performed. Thus, all data written to the base column "password" will now be written in encrypted form. The means for encryption could be a standard software or
- 20 hardware, for example a apparatus with a DES algorithm. The data is read from the maintenance column and processed by encryption means. The encryption could be either symmetrical or asymmetrical, for example DES or RSA respectively.

- 25 After step S5, the records from the maintenance column are copied to the base column through the encryption means in step S6. Thus, the contents of the

097195 1100

097195 1100

097195 1100

097195 1100

097195 1100

097195 1100

097195 1100

embodiment described above and comprises of the steps:
activating encryption means for the maintenance columns
corresponding to the base column, which is to be
encrypted; adding a trigger to the table, which transfers
5 action of data manipulation language (DML) statements
intended for the base column to the maintenance column;
copying all records from the base column to the
corresponding maintenance column through the encryption
means; and emptying said base column.

10 The invention has been described above in terms of a
preferred embodiment. However, the scope of this
invention should not be limited by this embodiment, and
alternative embodiments of the invention are feasible, as
should be appreciated by a person skilled in the art. For
15 example, if a column has a constraint indicating that a
value of a column can not be NULL, and this column is to
be encrypted, the constraint has to be removed
temporarily. Also, the method could also be used for
changing the strength of encryption on an chosen area or
20 when keys are to be changed, or when data is to be
reencrypted.

Such embodiments should be considered to be within
the scope of the invention, as it is defined by the
appended claims.

5 8. A method according to claim 1, comprising the
further step of.
changing the data type of said base area.

9. A method according to claim 8, wherein the data
10 type of the base column is changed to the data type RAW.

10. A method for altering encryption status in a relational database in a continuous process, wherein at least one table of said database comprises at least one
15 base area, and for each base area a corresponding area, comprising the steps of:
 activating encryption means for said corresponding column;
 directing action of commands intended for said base
20 area to said maintenance area;
 copying all records from said base area to said corresponding area; and
 emptying said base area.

25 11. A method according to claim 10, wherein said
base area is a first column of said table and said
maintenance area is a second column of said table.

12. A method for altering encryption status in a relational database in a continuous process, wherein at least one table of said database comprises at least one base column and at least one maintenance column, comprising the steps of:

copying all records from said base column to said maintenance column;

directing action of commands intended for said base column to said maintenance column;

altering encryption status of said base column;
copying all data records from said maintenance
column to said base column; and
redirecting action of commands to said base column.

5

13. A method according to claim 12, wherein said
step of directing is implemented in a trigger which is
added to said table.

10

14. A method according to claim 12 or 13, wherein
said commands are data manipulation language (DML)
statements.

15

15. A method according to claim 12, wherein each
base column in said database table have a corresponding
maintenance column.

ABSTRACT

5 A method for altering encryption status in a
relational database in a continuous process, wherein at
least one table of said database comprises at least one
base area and at least one maintenance area, comprising
the steps of: copying all records from said base area to
said maintenance area; directing action of commands
10 intended for said base area to said maintenance area;
altering encryption status of said base area; copying all
data records from said maintenance area to said base
area; and redirecting action of commands to said base
area.

15

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

Copyright © 2000 by Intel Corporation

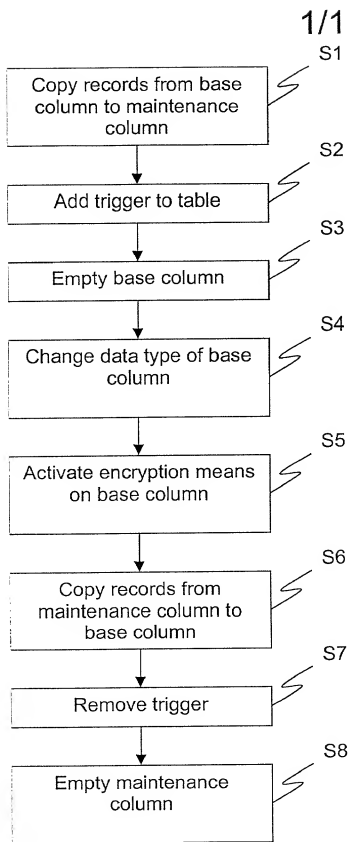


Fig. 1